

DOUBLE-SECTIONED WALLMOUNT CABINET STAR SERIES



Feature:

- Double -section wallmount cabinet.
- Tempered glass front door with 180° turning radius rotatable key lock.
- Removable side and rear panels for quick installation of equipment.
- Adjustable front and rear mounting posts conform to different equipment depth requirements. Dual mounting post with #12-24 threaded holes and square holes for cage nuts.
- Ventilated door design for added air flow and cooling.
- Cable entry brush panel on the top cover and knock-outs on the bottom plate.
- Provided with 1 fans with UL cord installed. Additional fan may be provided upon request.
- Easy to wall mount back plate.
- Available in heights from 6u to 23u.
- Fully assembled for quick installation and packaged in a honeycomb carton. aOptional space saving flat packaging available upon request.

Standards:

Complies with ANSI/EIA RS-310-D, IEC297-2, DIN41491; PART1, DIN41494; PART7, GB/3047.2-92 standards, UL certified

Material:

SPCC Cold Rolled Steel.

Static Loading Capacity:

NTDWC6U600: 70 kgs
NTDWC9U600: 70 kgs
NTDWC12U600: 75 kgs
NTDWC16U600: 80 kgs
NTDWC20U600: 90 kgs
NTDWC23U600: 95 Kgs

Degree of Protection:

IP20

Thickness of Steel :

Mounting post: 1.5mm, frame: 1.2mm, back panel: 1.5mm, front door frame: 1.2mm,
Others: 1.0mm

Surface treatment:

Degreasing, pickling, phosphoric treatment, powder spraying

Colors option:


RAL9004/9005 BLACK; Standard Stocking Color

RAL7035 COMPUTER GRAY; Special Order. Lead times may vary.

RAL9010 CREAM WHITE; Special Order. Lead times may vary.

Ordering Information:

Specifications				AWG				
Part Number	RU	Format	Depth	High	Width	Front Door	Bottom Panel	Side Panels
NTDWC6U600	6	19"	650mm	320mm	600mm	20	20	16
NTDWC9U600	9	19"	650mm	485mm	600mm	20	20	16
NTDWC12U600	12	19"	650mm	620mm	600mm	20	20	16
NTDWC16U600	16	19"	650mm	795mm	600mm	20	20	16
NTDWC20U600	20	19"	650mm	975mm	600mm	20	20	16
NTDWC23U600	23	19"	650mm	1107mm	600mm	20	20	16

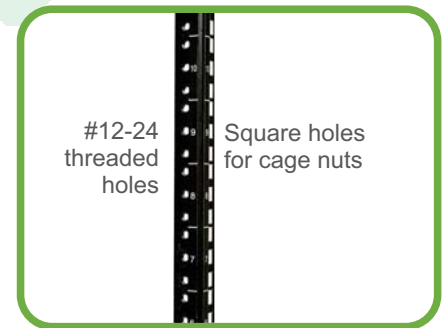

This product is designed for the installation of telecommunication and network equipment. Nitrotel provides the information and specifications herein on an "AS IS" basis, with no representations or warranties, whether express, statutory or implied. In no event will Nitrotel be liable for any damages (including consequential, indirect, incidental, special, punitive, or exemplary damages) whatsoever, even if Nitrotel has been advised of the possibility of such damages, whether in an action under contract, negligence or any other theory, arising out of or in connection with the use, or inability to use, the information or specifications described herein.

All sales of Nitrotel products are subject to Nitrotel's standard terms and conditions of sale

